

Austermann Collection Fall/Winter 2010 Pattern 7



All rights reserved. No part may be reproduced in any form without written permission from the publisher. This includes the reproduction, translation and microfilming as well as storing and processing in electronic systems. It is also not permitted to scan, save to PC or CD, to change or manipulate images.

**Schoeller Süßen GmbH · Postfach 1160 · D-73073 Süßen ·
Phone +49/7162-93050-15 · Fax +49/7162-430-80 · www.austermann-wolle.de**

Pattern 7 Woman's Jacket with Extra Collar

Sizes

Instructions are for Woman's Size Small. Changes for sizes Medium and Large are in parentheses. If there is only one number it applies to all sizes.

Bust: 33 (36/40)"/84 (91/102) cm
 Length: 31 1/2 (32/32 3/4)"/80 (81,5/83) cm
 Upper arm: 16 1/2 (17 1/2 / 19)"/42 (45/48) cm

Materials – Merino 85 from Austermann
100% Merino Wool extrafine superwash, each ball = approx 85 m/ 50 g
20 (21/22) balls in color #16 dunkelblau (dark blue)

One pair each sizes US 8 and 10 (5 and 6 mm) needles, OR SIZE TO OBTAIN GAUGE, from Schoeller + Stahl. Two cable needles (cn).

Other Materials: 5 buttons

Gauge: 16 sts and 22 rows = 4 x 4"/10 x 10 cm over St st using size US 10 (6 mm) needles. TAKE TIME TO CHECK GAUGE.

St st: K on RS, P on WS.

Cable pat over 14 sts:

Rows 1 3, 5, 7,13,15 and 17 (RS): K3, P1, K6, P1, K3.

Row 2 and all WS rows: K the knit sts and P the purl sts.

Row 9: Slip 3 sts to cn and hold to front of work, slip 1 st to a 2nd cn and hold to back of work, K the next 3 sts, P1 from the 2nd cn, K3 from the first cn, slip 4 sts to cn and hold to back of work, K3, then slip the 4th st from the cn to a 2nd cn and hold it to back of work, slip the 3 sts from the first cn to LH needle, then slip the 1 st from the 2nd cn to LH needle, P1, K3.

Rows 11 and 19: K3, P1, slip 3 sts to cn and hold to back of work, K3, then K3 from cn, P1, K3.

Row 20: Rep row 2.

Rep Rows 1 – 20 for cable pat.

Instructions:


Lower Back:

With size US 8 (5 mm) needles, cast on 78 (86/92) sts and work in K1, P1 rib for 2"/5 cm. Change to size US 10 (6 mm) needles and work in St st until piece measures 10"/25 cm from beg. Dec 1 st each side on next row and every 12th row 3 times more. Work even until piece measures 19 1/2"/50 cm from beg. Bind off all sts.

Lower Right Front:

With size US 8 (5 mm) needles, cast on 44 (48/52) sts and work in K1, P1 rib for 2"/5 cm (with K1 at LH side), and inc 1 st in center of last WS row = 45 (49/53) sts. Change to size US 10 (6 mm) needles and work in St st, keeping the first 9 sts at front edge in K1, P1 rib. Work decs at LH side same as Back. Work even until piece measures 19 1/2"/50 cm from beg. Slip the 9 sts at front edge on a holder and bind off the rem sts.

Lower Left Front: Work to correspond to Right Front, reversing shaping and placement of rib front band.

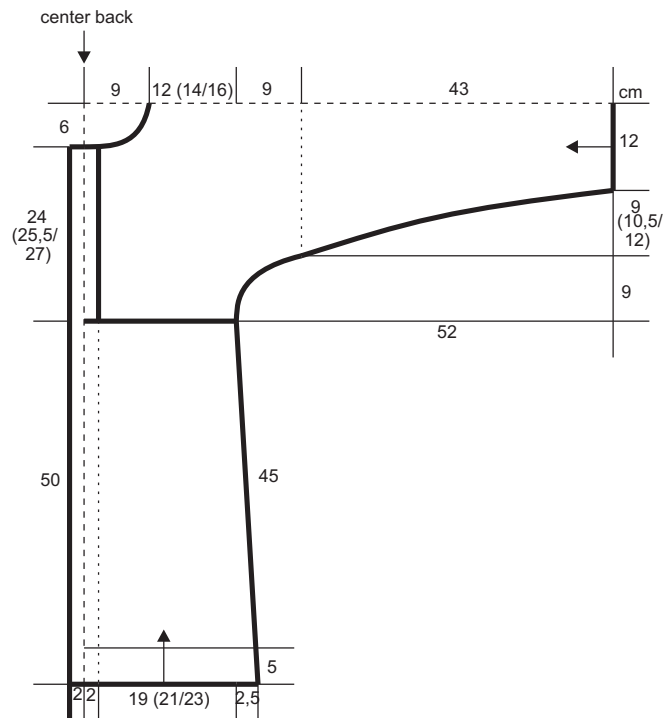

Top piece:

With US 10 (6 mm) needles, cast on 42 sts for sleeve cuff and work in K2, P2 rib. For side seam shaping, inc 1 st each side (working inc sts into rib) every 6th (5th/4th) row 15 (17/19) times and on the last WS row, inc 4 (2/0) sts evenly spaced across = 76 (78/80) sts.

Work even until piece measures 17"/43 cm from beg. Cont in pats as foll: K0 (1/2), P1, *14 sts Cable pat, P1, K4, P1; rep from * 2 times more, 14 sts Cable pat, P1, K0 (1/2). After 22 rows of Cable pat have been worked, cast on 20 (19/18) sts at beg of next 2 rows = 116 sts, and work in pats as foll: 1 selvage st, *14 sts Cable pat, P1, K4 sts, P1; rep from *, end with 14 sts Cable pat, 1 selvage st. After 48 (52/56) rows have been worked, divide the work in 2 and work both sides at once and on the left side work neck shaping on front as foll: bind off from neck edge 3 sts once, 2 sts once and dec 1 st every 2nd row 6 times.

After 66 (70/74) rows of Cable pat have been worked, bind off the Front sts. Work over the Back sts until 90 (94/98) rows of Cable pat have been worked. For the 2nd Front cast on 47 sts and work in Cable pat, beg the pat at the same row as the 72nd (76th/80th) row of Back (so that pat matches when joined to the Back). After 4 rows, work neck shaping as foll: inc 1 st at Front neck edge every 2nd 6 times, then cast on 2 sts once and 3 sts once. Then join Back and work over all 116 sts until 116 (124/132) rows have been worked in Cable pat. Bind off 20 (19/18) sts at beg of next 2 rows. Cont over rem 76 (78/80) sts in Cable pat for 22 rows more = 138 (146/154) rows in Cable pat. Work sleeve decs to correspond with incs on first sleeve, and complete to correspond to first sleeve. When piece measures 57 1/2 (59/60 1/2)"/146 (150/154) cm in total, bind off rem 42 sts.

SHORT ROW WRAPPING (wrap and turn - w&t)

1) Wyib, sl next st purlwise. 2) Move yarn between the needles to the front. 3) Sl the same st back to LH needle. Turn work, bring yarn to back between needles. One st is wrapped. 4) When short rows are completed, work to just before wrapped st, insert RH needle under the wrap and knitwise into the wrapped st, k them together.

Extra Collar:

With US 10 (6 mm) needles, cast on 83 sts and work in K2, P2 rib. Work in Short rows as foll: Work 3 rows over all sts, *on the next row work 50 sts, w&t (see above). Work 4 rows over all sts knitting wrapped st tog with corresponding st on needle to close holes. Rep from * until the short side measures 3/4"/2 cm. For the buttonholes, bind off the 10th, 30th, 50th and 70th st on the next row and on the foll row cast on over bound-off sts. Cont in short rows as before until short side measures 23"/58 cm. Bind off all sts in rib.

Fold the collar in half so that the 2 sets of buttonholes meet. Sew on 2 buttons opposite the buttonholes.

Finishing:

Sew the side and sleeve seams of top piece. With RS facing and size US 10 (6 mm) needles, pick up and K 74 sts around neck edge and work in K2, P2 rib for 1 1/2"/4 cm. Bind off sts in rib. Sew the lower pieces to the top piece.

Button and neckband: Slip 9 sts of Left Front holder to size US 8 (5 mm needles and pick up 1 st at inside edge = 10 sts. Work in K1, P1 rib until band fits along top piece and one half back neck. Place sts on holder. Sew side of band along Left Front and one half back neck.

Buttonhole and neckband: Slip 9 sts of Left Front holder to size US 8 (5 mm needles and pick up 1 st at inside edge = 10 sts. Work in K1, P1 rib, working buttonholes at 21 1/4, 25 and 29"/54, 64/74 cm from beg, by binding off 5 sts in center of band, then cast on 5 sts over bound-off sts on following row. Complete same as Button and neckband. Weave sts tog at center back neck. Sew buttons to Front.